

15

1/19

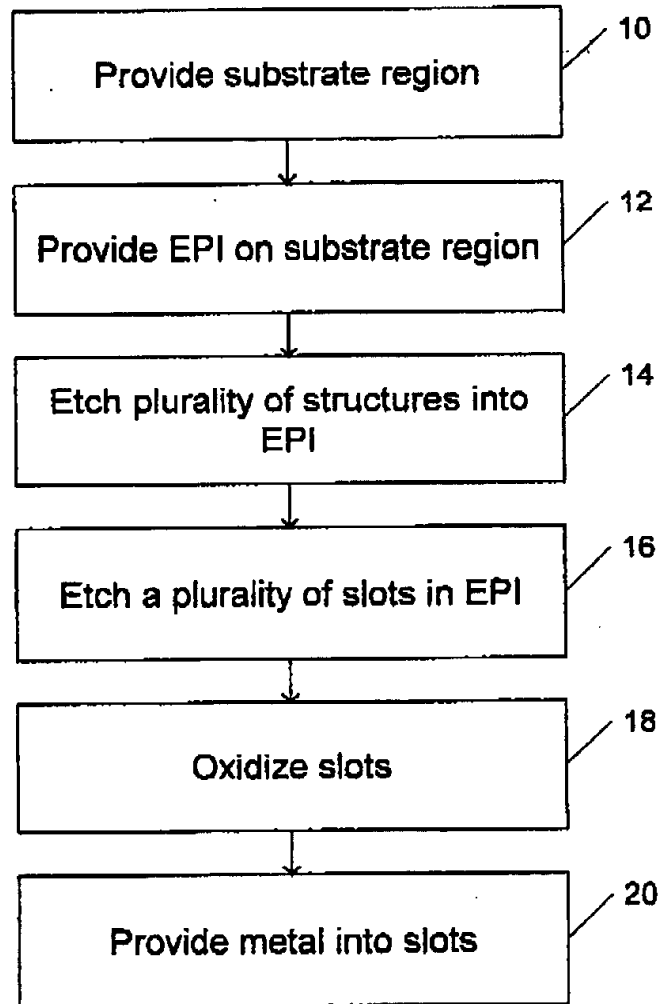


Fig. 1

2/19

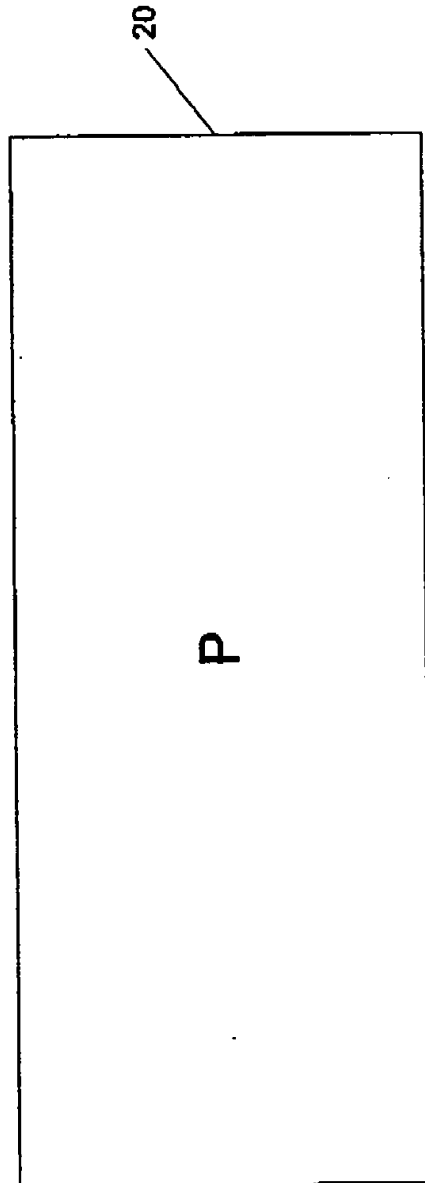


Fig. 2a

3/19

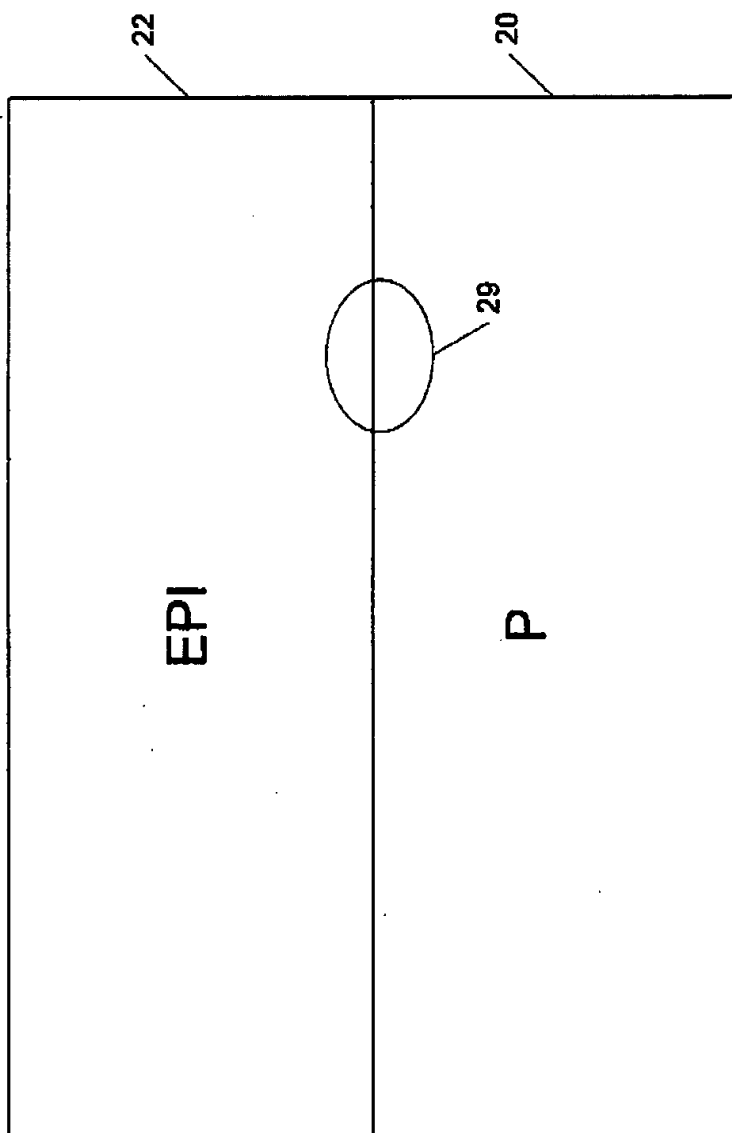


Fig. 2b

4/19

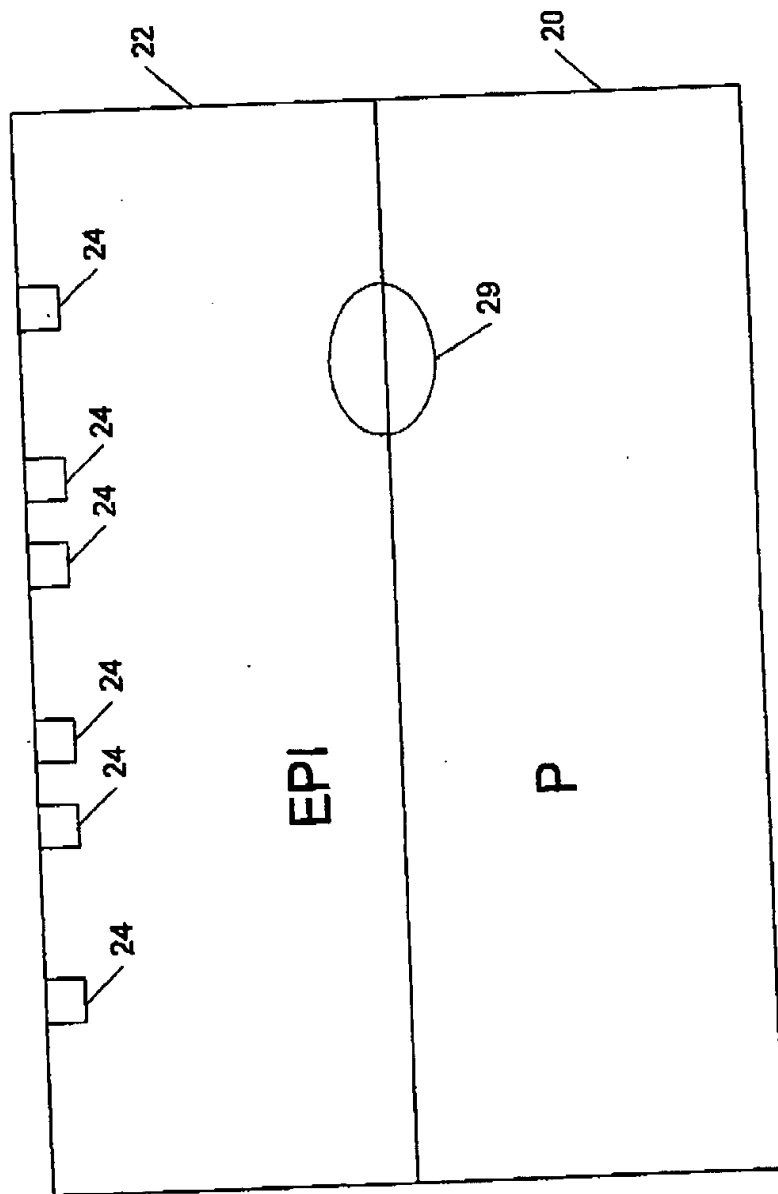


Fig. 2c

5/19

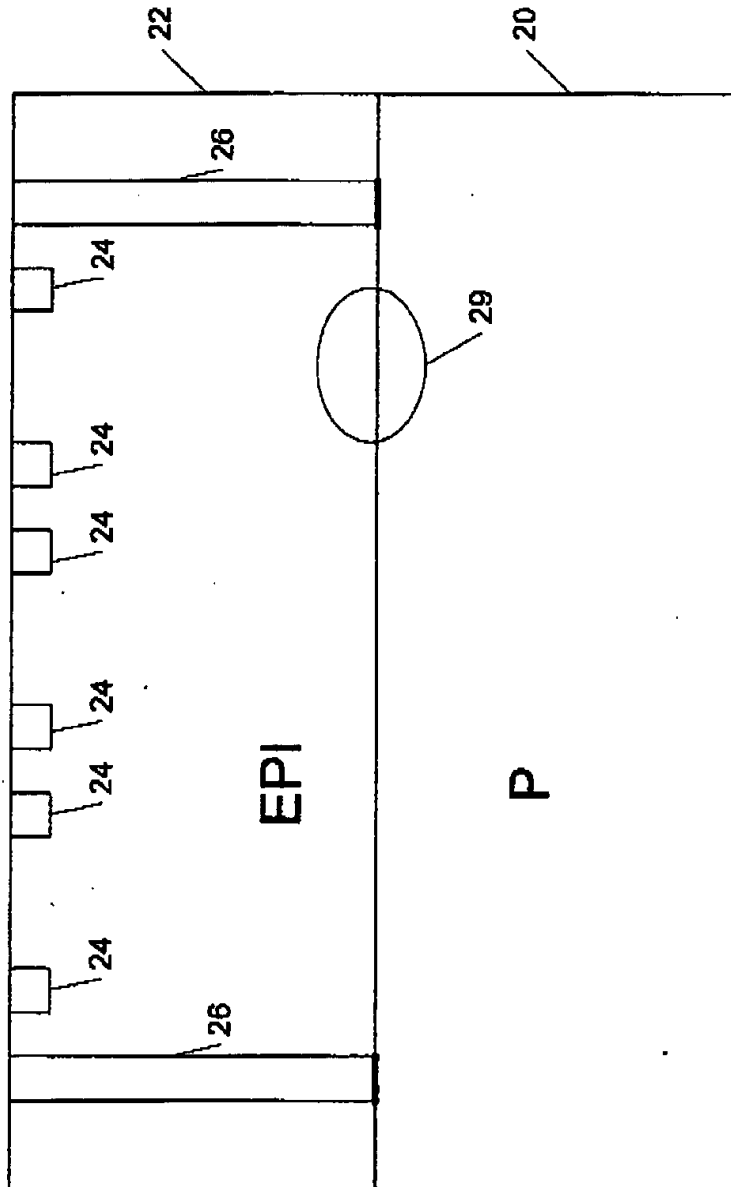


Fig. 2d

6/19

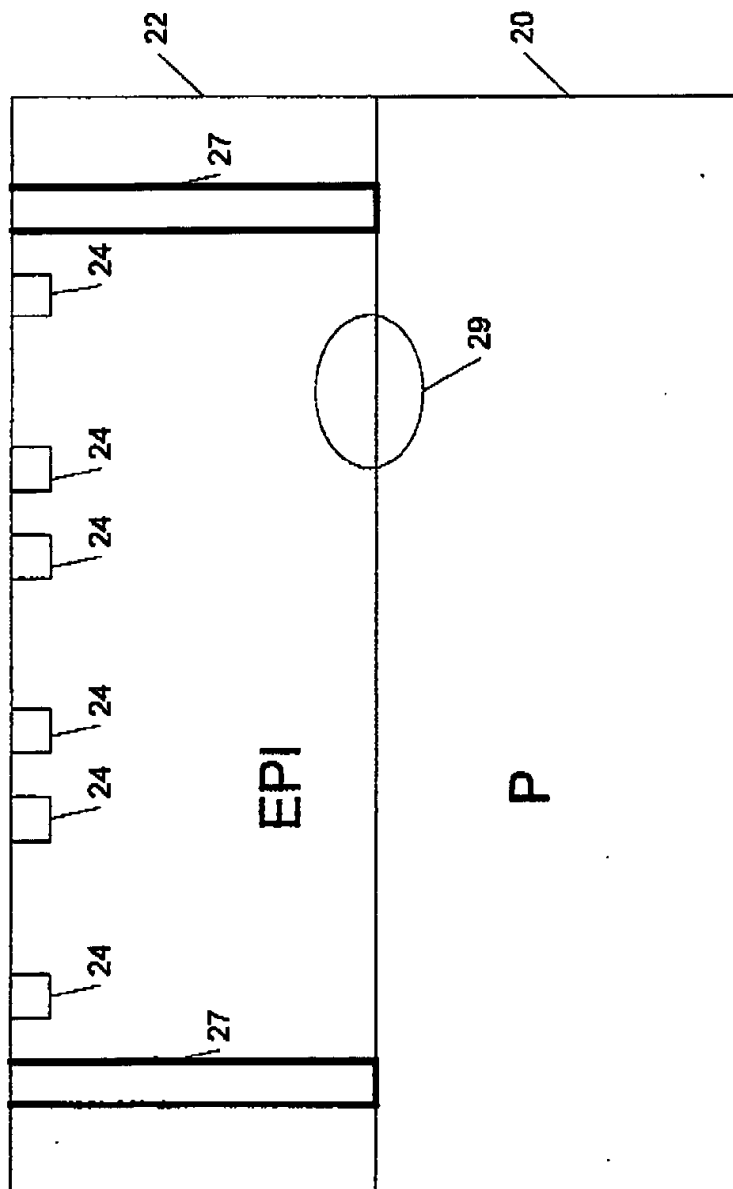


Fig. 2e

7/19

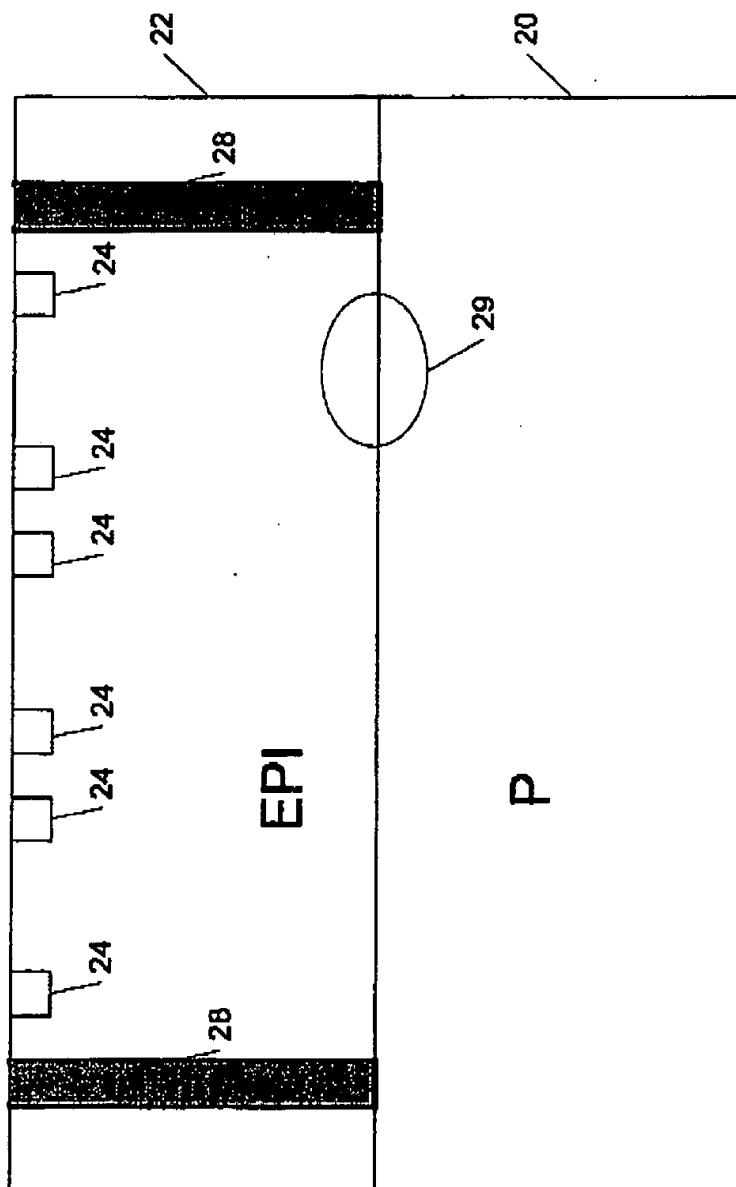


Fig. 2f

8/19

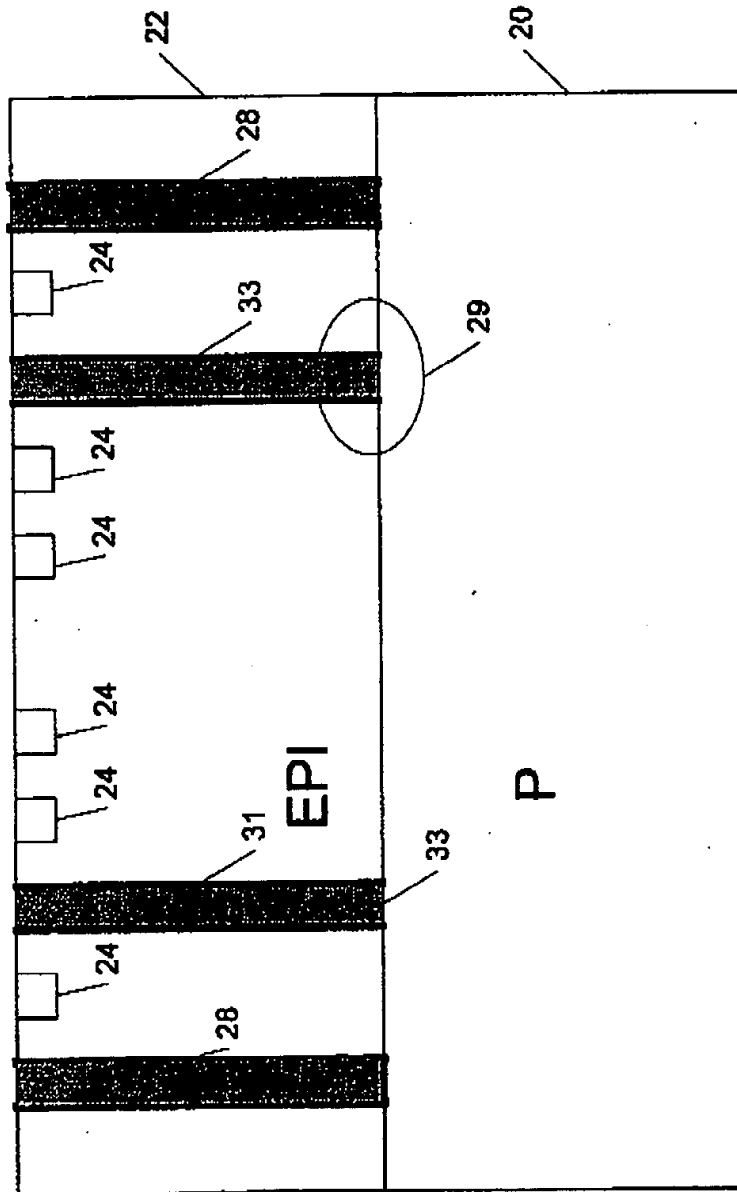


Fig. 2g

9/19

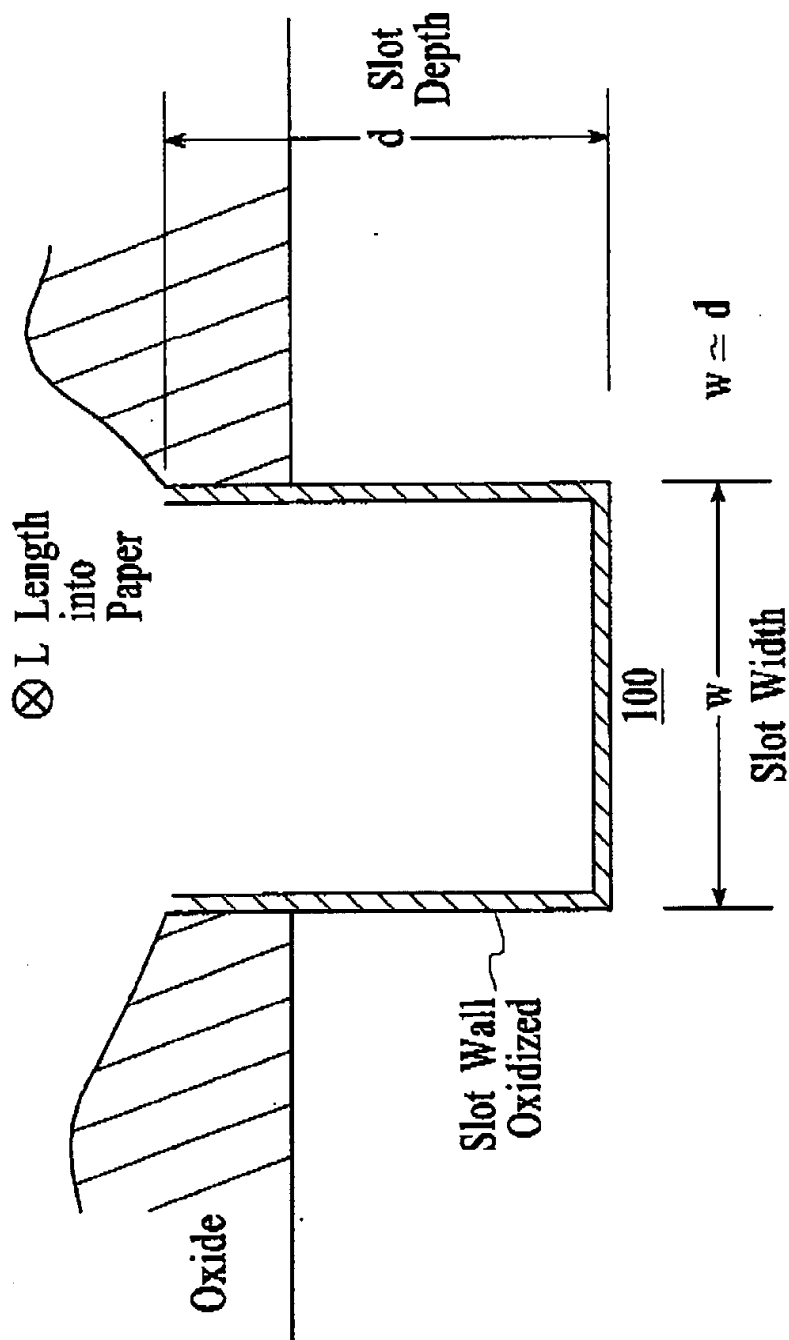


FIG. 3

10/19


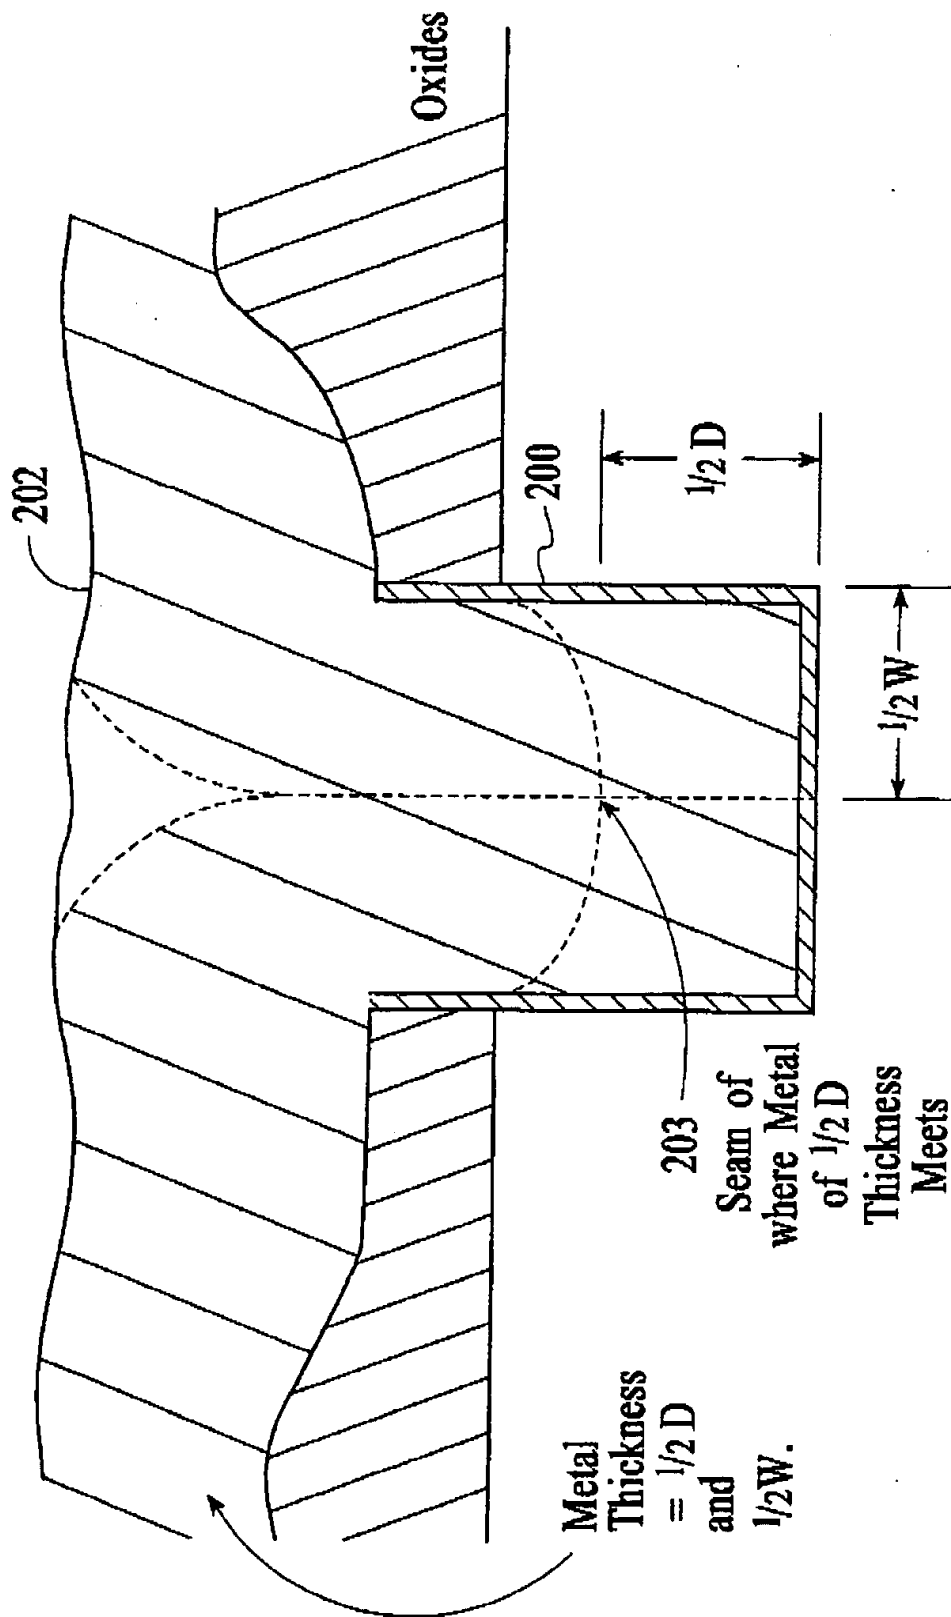


FIG. 4

11/19

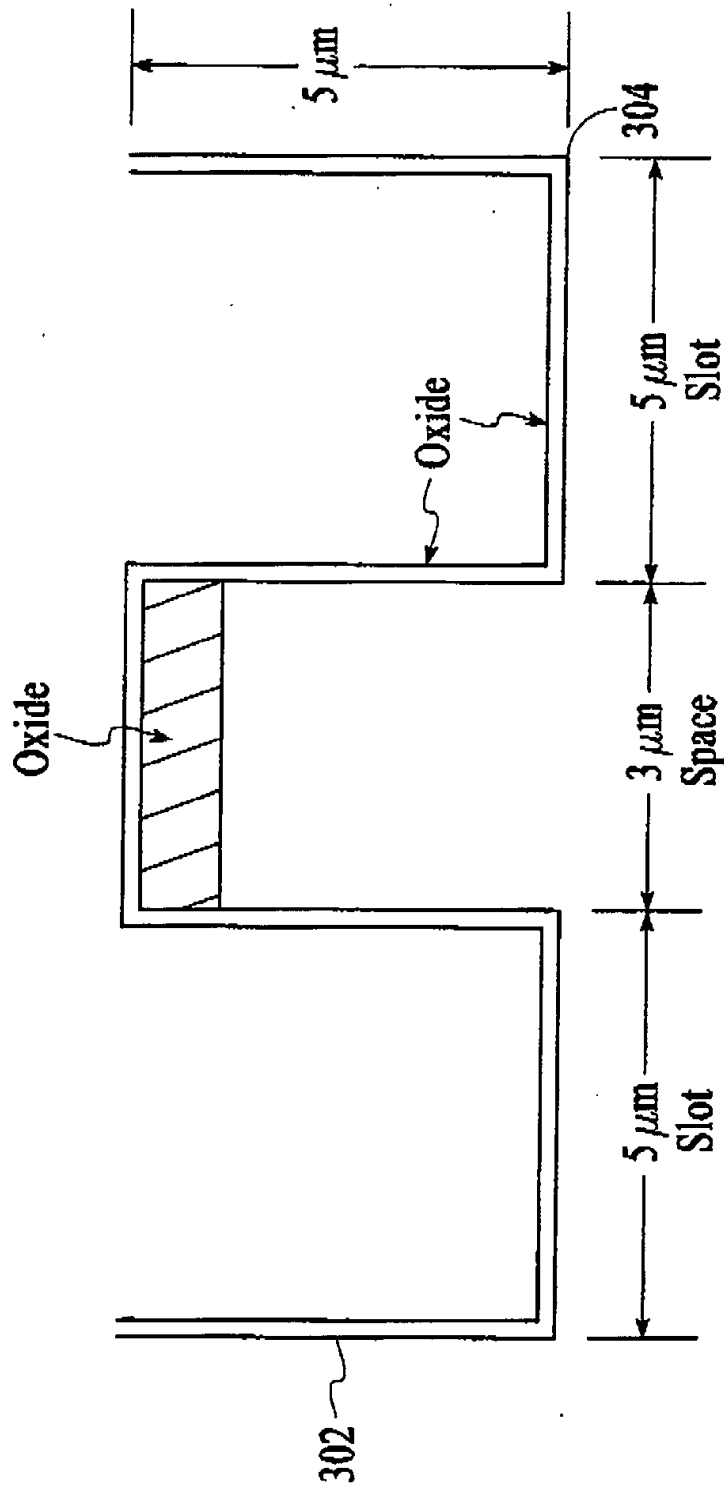

Double Slot for  
Double Width of Metal  
3  $\mu\text{m}$  Space Between Slots

FIG. 4A

12/19

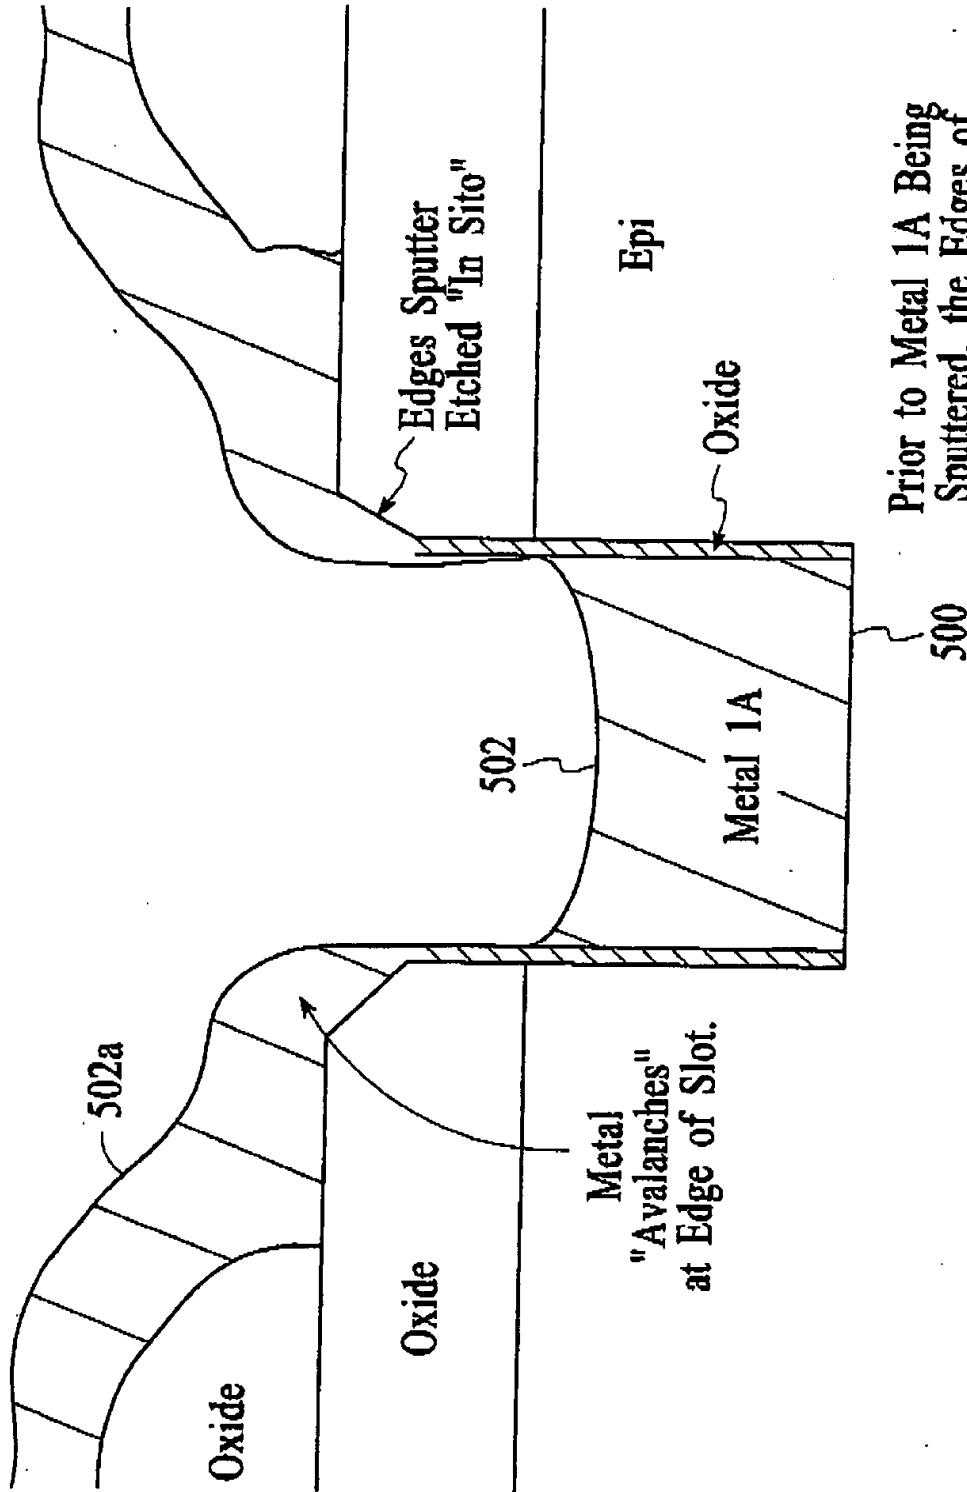


FIG. 5

13/19


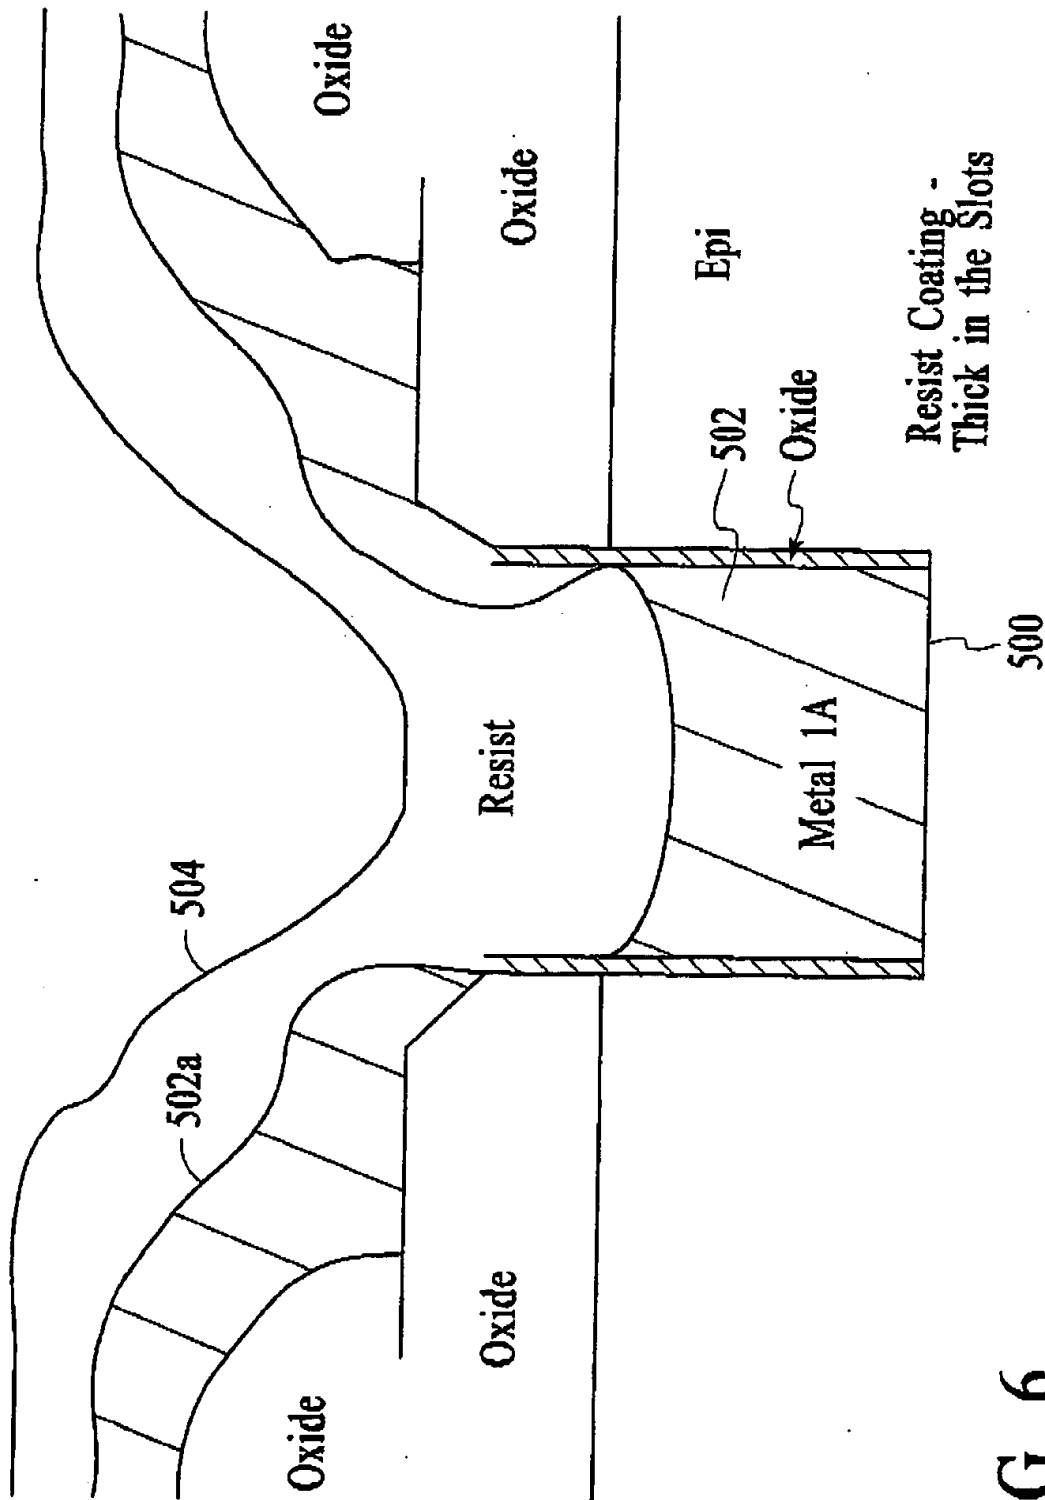


FIG. 6


14/19

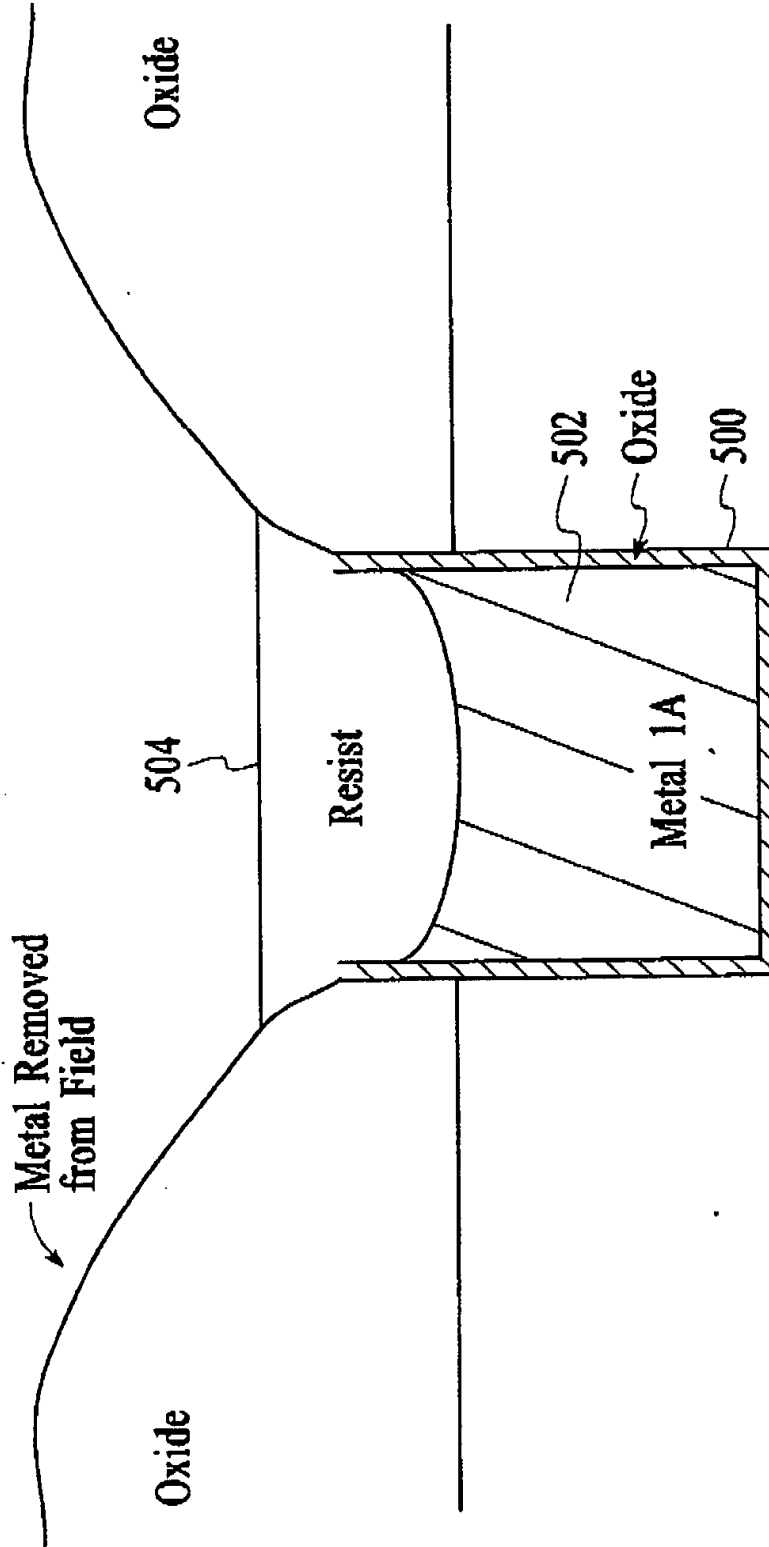

Resist Planar Etched Leaving Resist  
in Slots. Field Metal Etched Off.

FIG. 7

15/19

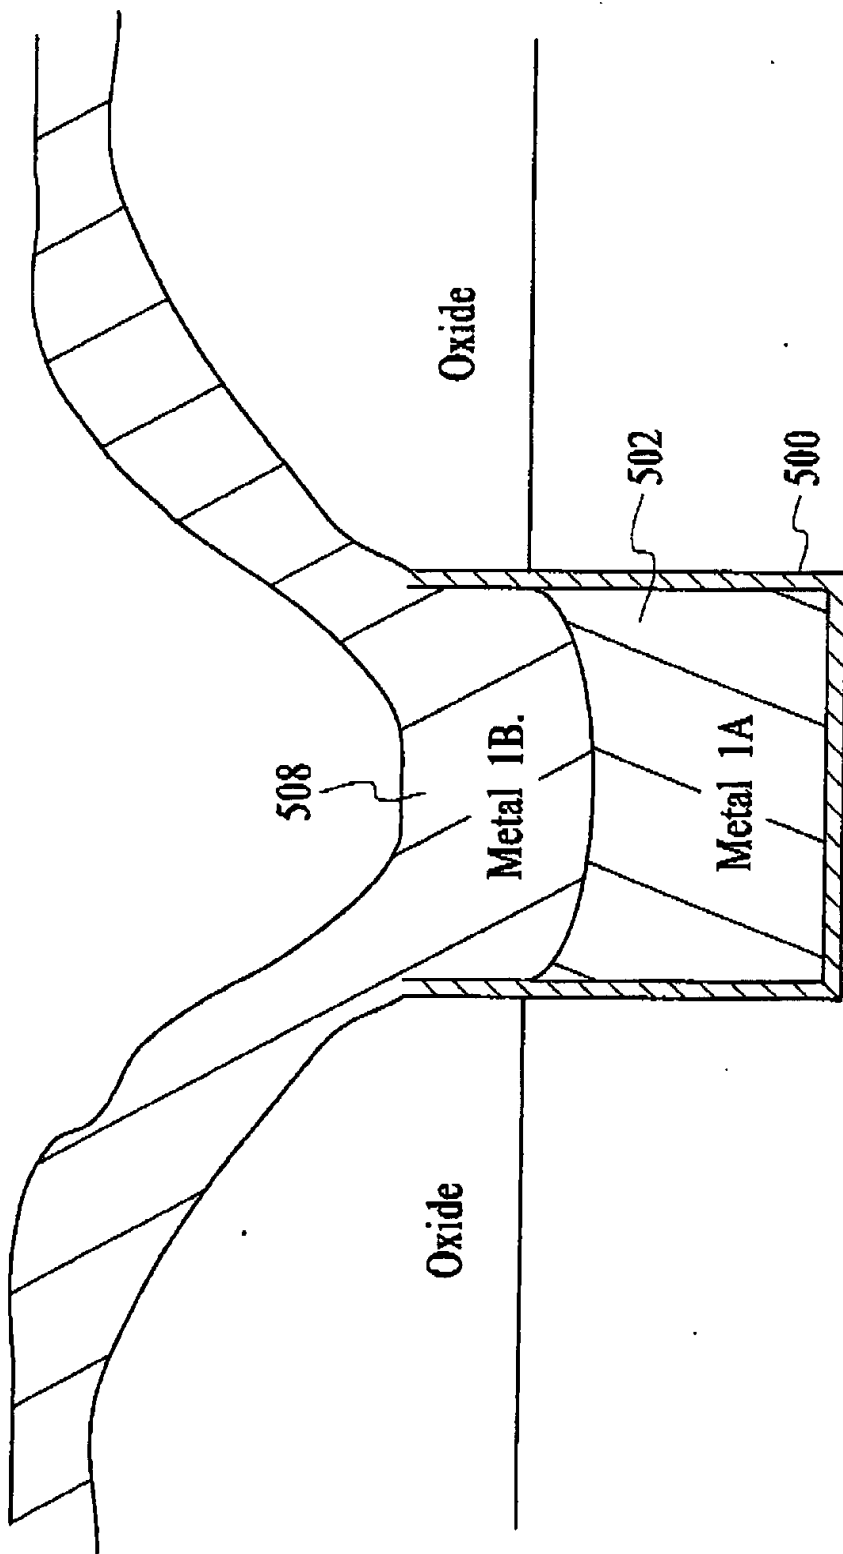

Resist Stripped & Second Metal 1B  
Sputter Deposited

FIG. 8

16/19

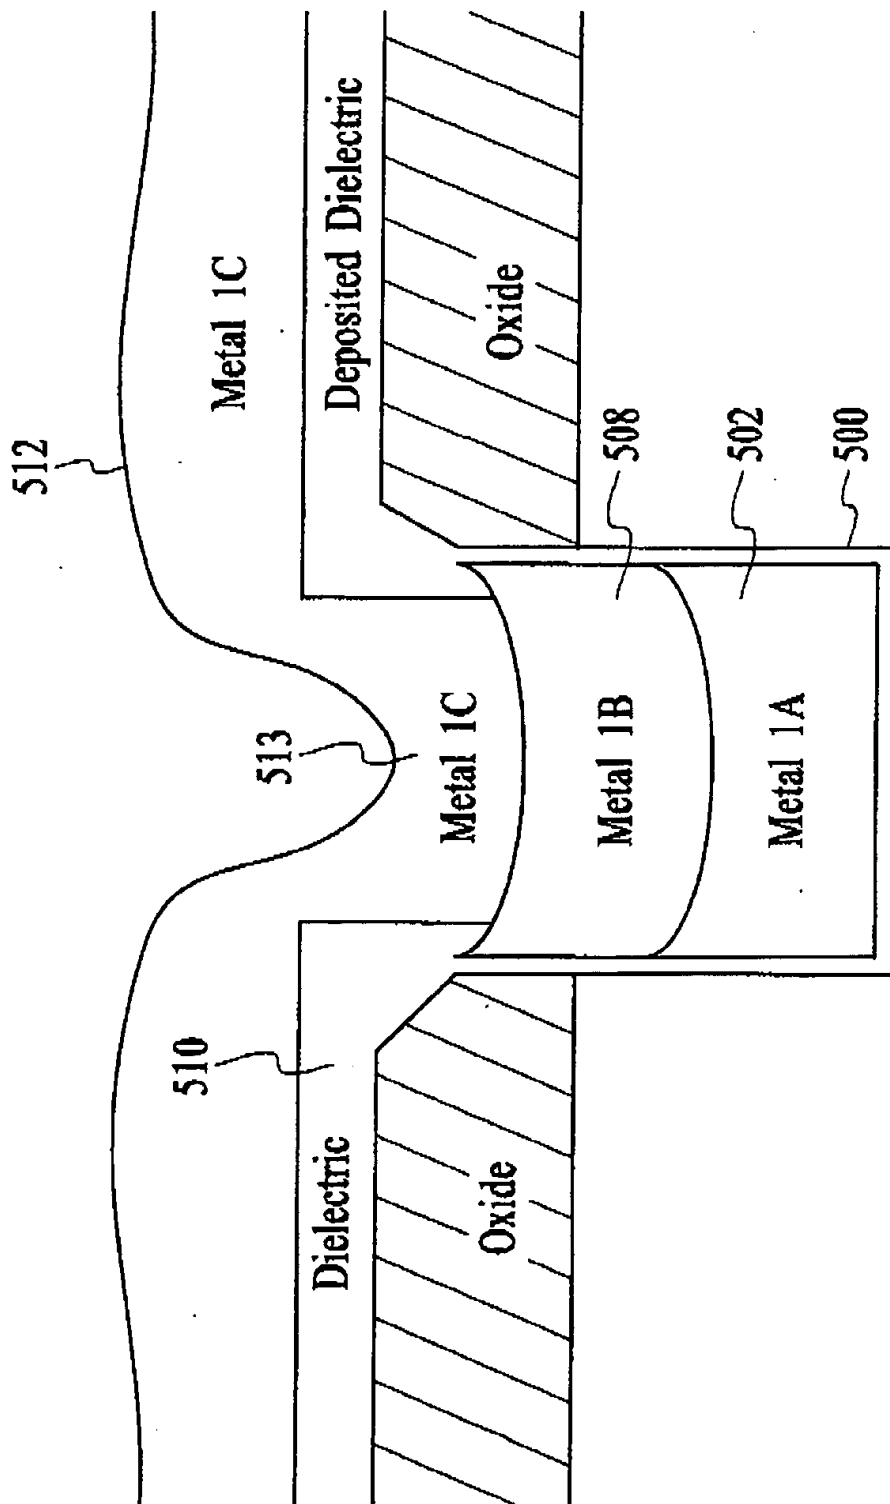


FIG. 9

17/19


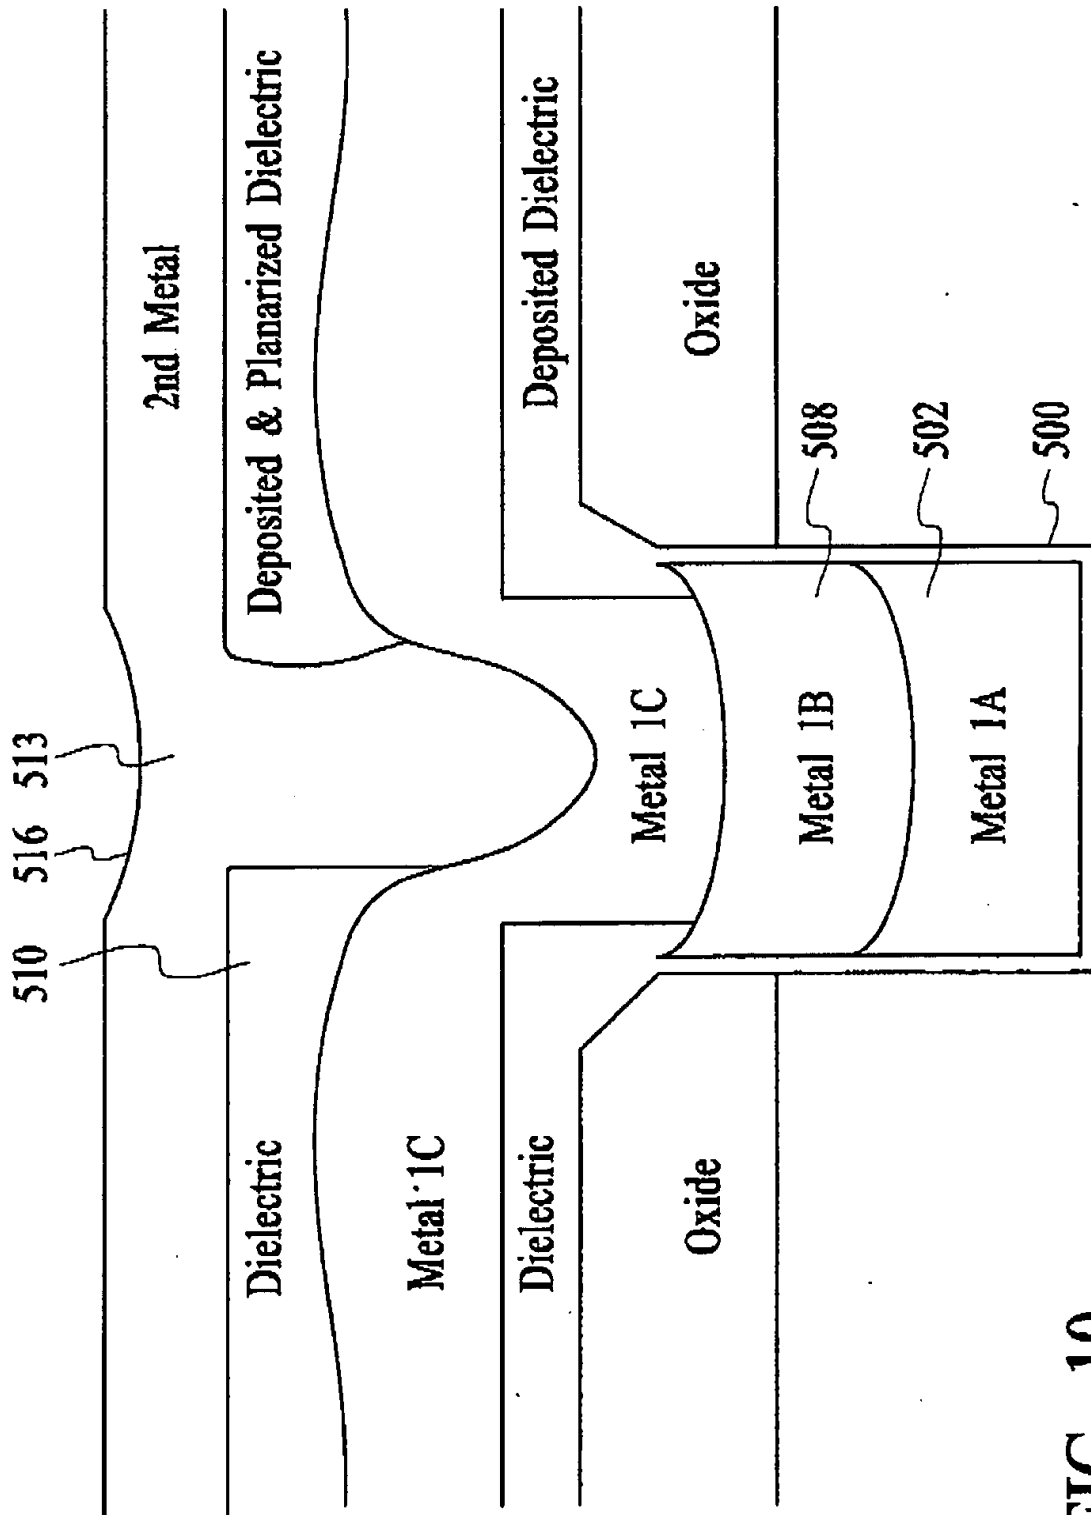


FIG. 10

18/19

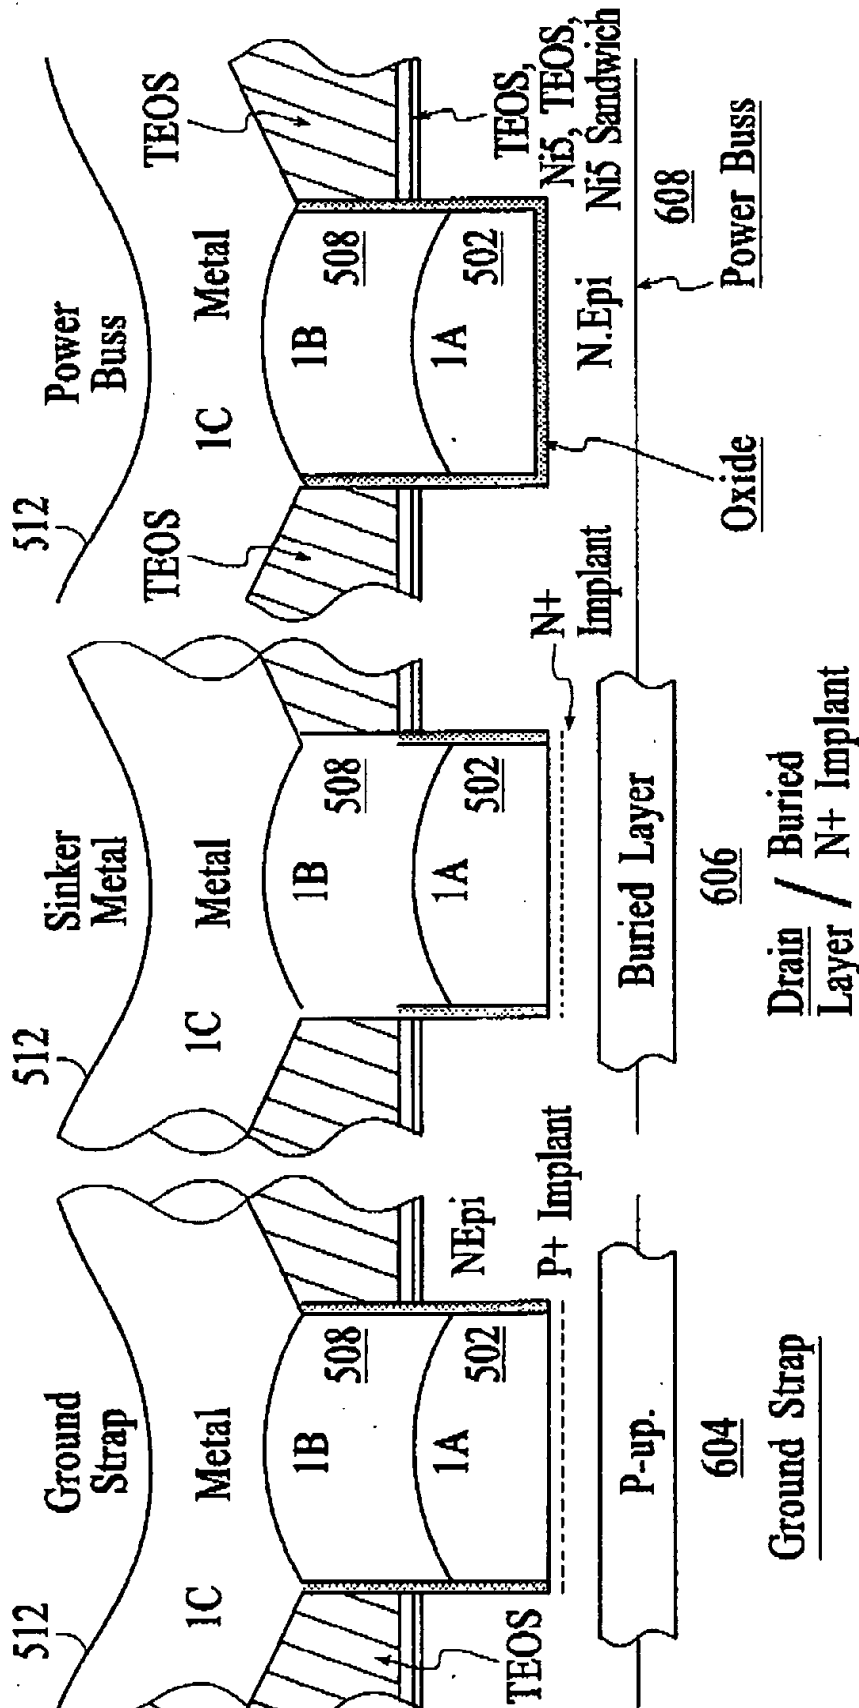

Ground Strap / Power Buss / Drain Metal Sinker

Shown after layers of Dielectric followed by 90 OD A TEOS - Polish - Slot Mask - Metal. Metal 1.5 - 2.0 μm deposited.

FIG. 11

Power Metal

19/19

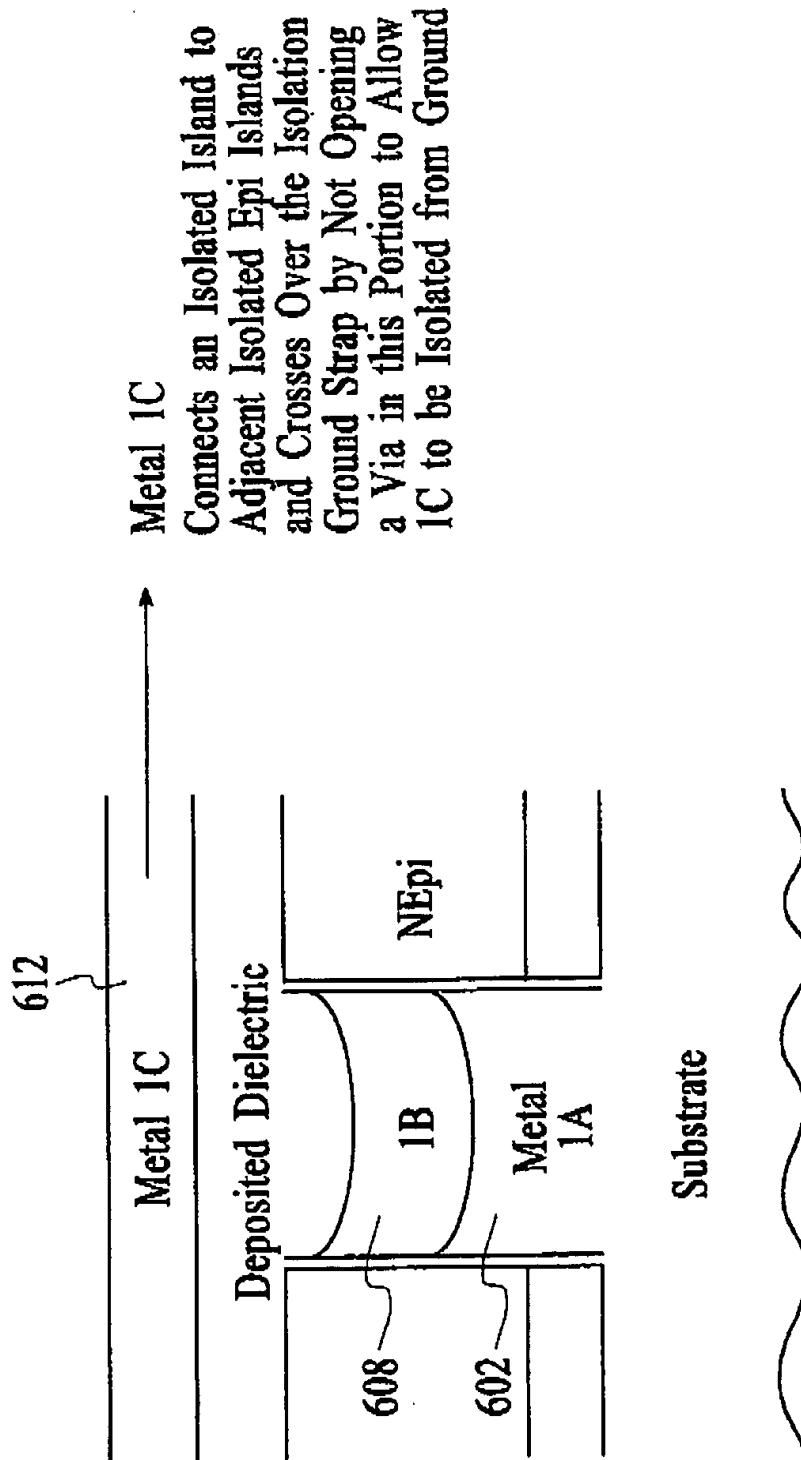


FIG. 12